

MUR110-MUR1100

1.0Amp Super Fast Rectifiers

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ Low forward voltage, high efficiency.
- ◆ For use in low voltage, high frequency inverters.
- ◆ Dual rectifier construction, positive center tap.
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375"(9.5mm) lead length,
5 lbs. (2.3kg) tension

Mechanical Data


Case: JEDEC DO-41 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight : 0.012 ounce, 0.33 grams

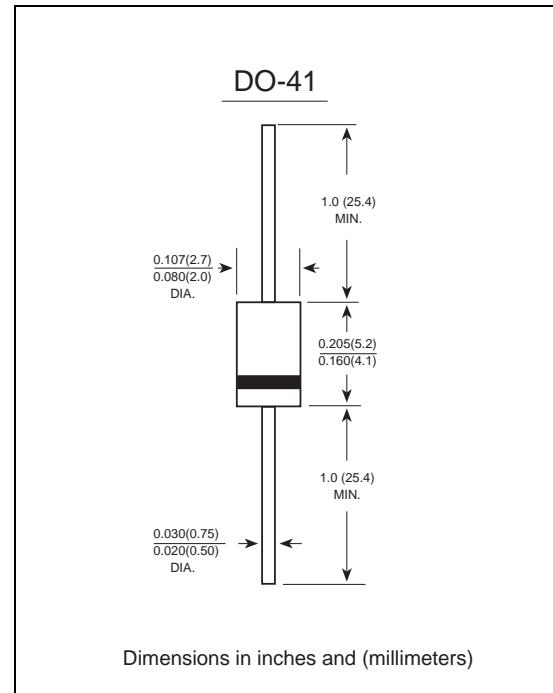

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	MUR110	MUR120	MUR140	MUR160	MUR180	MUR1100	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V _{RMS}	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V _{DC}	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at T _L =60°C	I _(AV)	1.0					Amp	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	35					Amps	
Maximum instantaneous forward voltage at 1.0A	V _F	0.95		1.35	1.7	Volts		
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	10.0 500.0					uA	
Maximum reverse recovery time (NOTE 1)	t _{rr}	45		60	75	nS		
Typical junction capacitance (Note 2)	C _J	15					pF	
Typical thermal resistance	R _{QJA}	62.5					°C/W	
Storage temperature range & Operating junction	T _{J,TSTG}	-55 to +150					°C	

Note: 1.Reverse recovery time test condition: IF=0.5A IR=1.0A Irr=0.25A

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.