

## KBP2005~KBP210

### Single Phase 2.0Amp Glass Passivated Bridge Rectifier

#### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

#### Mechanical Data


**Case:** Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on case

**Mounting Position:** Any

**Weight:** 0.069 ounce, 1.95 grams

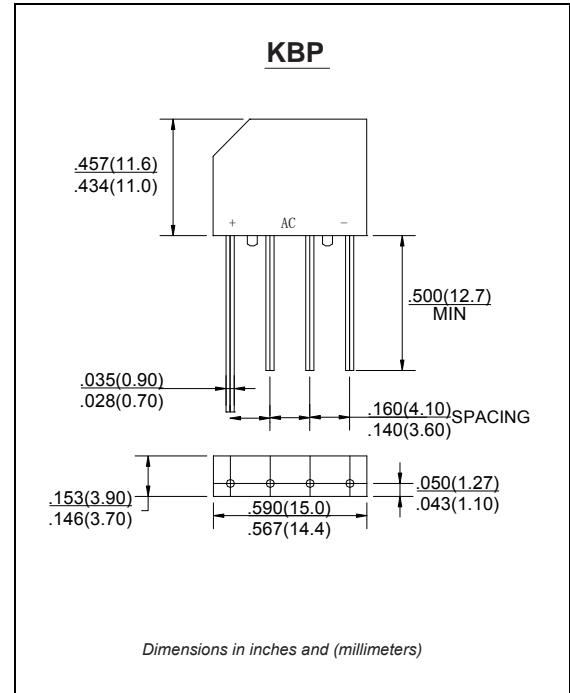

#### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	KBP2005	KBP201	KBP202	KBP204	KBP206	KBP208	KBP210	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	VOLTS
Maximum average forward output rectified current at TA=50°C	I <sub>(AV)</sub>						2.0		Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>						50.0		Amps
Rating for Fusing(t<8.3ms)	I <sup>2</sup> t						10		A <sup>2</sup> s
Maximum instantaneous forward voltage drop per bridge element at 1.0A	V <sub>F</sub>						1.0		Volts
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I <sub>R</sub>						10		µA
							0.5		mA
Typical Junction Capacitance (Note 1)	C <sub>J</sub>						20		pF
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>						28		°C/W
Operating junction temperature range	T <sub>J</sub>					-60 to +150			°C
storage temperature range	T <sub>STG</sub>					-60 to +150			°C

NOTES: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.

2. Unit mounted on P.C. board with 0.47" x 0.47" (12x12mm) copper pads, 0.375" (9.5mm) lead length.

## Ratings And Characteristic Curves

### KBP2005 THRU KBP210

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

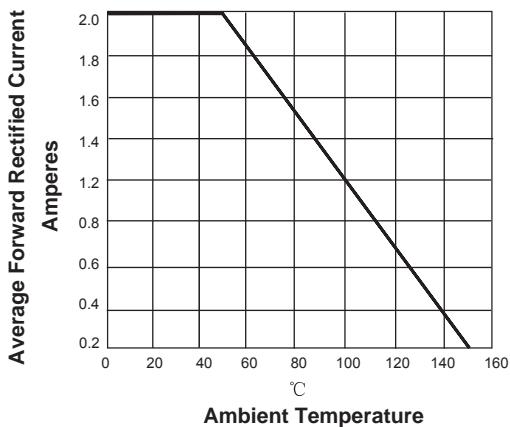


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

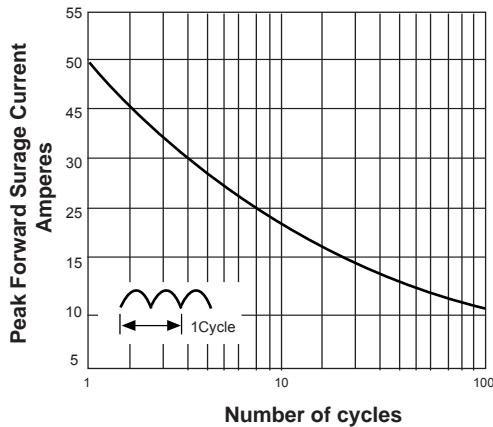


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

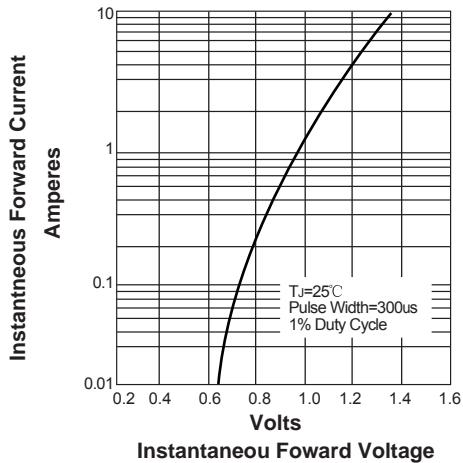


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

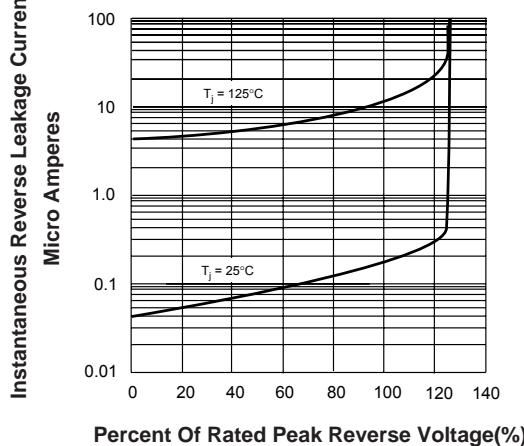


FIG. 5-TYPICAL JUNCTION CAPACITANCE

