

## 1N5400 ~ 1N5408

### 3.0Amp General Rectifiers

#### Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Open-Junction chip ,silastic passivated
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed 250°C/10 seconds at terminals

#### Mechanical Data


**Case:** JEDEC DO-27 molded plastic body

**Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight :** 0.04 ounce, 1.10 grams

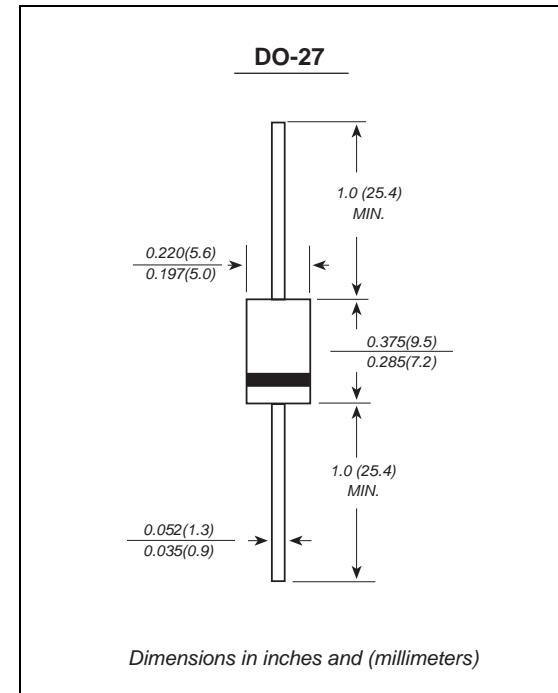

#### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz,resistive or inductive load, for capacitive load current derate by 20%.

|  | SYMBOLS                        | 1N<br>5400   | 1N<br>5401 | 1N<br>5402 | 1N<br>5403 | 1N<br>5404 | 1N<br>5405 | 1N<br>5406 | 1N<br>5407 | 1N<br>5408 | UNITS |
|--|--------------------------------|--------------|------------|------------|------------|------------|------------|------------|------------|------------|-------|
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>               | 50           | 100        | 200        | 300        | 400        | 500        | 600        | 800        | 1000       | VOLTS |
| Maximum RMS voltage  | V <sub>RMS</sub>               | 35           | 70         | 140        | 210        | 280        | 350        | 420        | 560        | 700        | VOLTS |
| Maximum DC blocking voltage  | V <sub>DC</sub>                | 50           | 100        | 200        | 300        | 400        | 500        | 600        | 800        | 1000       | VOLTS |
| Maximum average forward rectified current at T <sub>L</sub> =75°C                                  | I <sub>(AV)</sub>              | 3.0          |            |            |            |            |            |            |            | Amp        |       |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)   | I <sub>FSM</sub>               | 150          |            |            |            |            |            |            |            | Amps       |       |
| Maximum instantaneous forward voltage at 3.0A  | V <sub>F</sub>                 | 1.0          |            |            |            |            |            |            |            | Volts      |       |
| Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =100°C | I <sub>R</sub>                 | 5.0<br>100.0 |            |            |            |            |            |            |            | uA         |       |
| Typical junction capacitance (Note 2)  | C <sub>J</sub>                 | 30           |            |            |            |            |            |            |            | pF         |       |
| Typical thermal resistance (Note 3)  | R <sub>QJA</sub>               | 20           |            |            |            |            |            |            |            | °C/W       |       |
| Operating junction and storage temperature range   | T <sub>J,T<sub>STG</sub></sub> | -50 to +155  |            |            |            |            |            |            |            | °C         |       |

**Note:**1.Reverse recovery time test condition: IF=0.5A IR=1.0A Irr=0.25A

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.Thermal resistance from junction to ambient at 0.375 " (9.5mm)lead length,P.C.B. mounted

## Ratings And Characteristic Curves

### 1N5400 THRU 1N5408

FIG. 1- FORWARD CURRENT DERATING CURVE

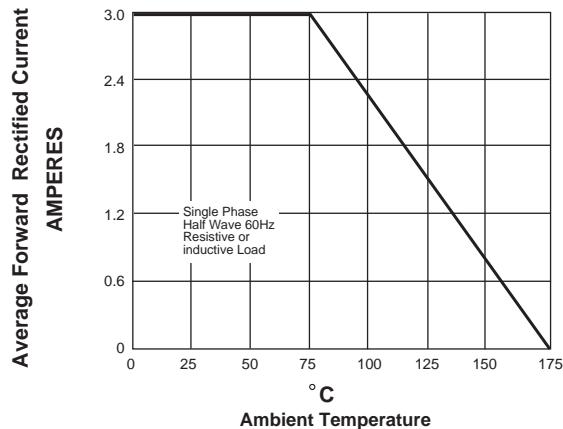


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

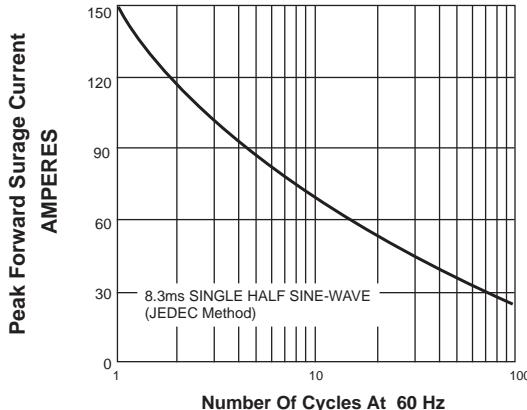


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

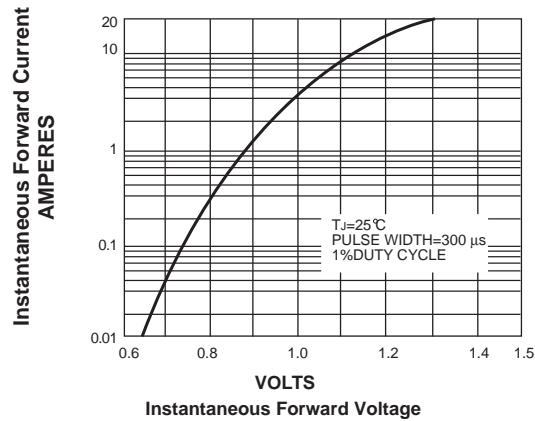


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

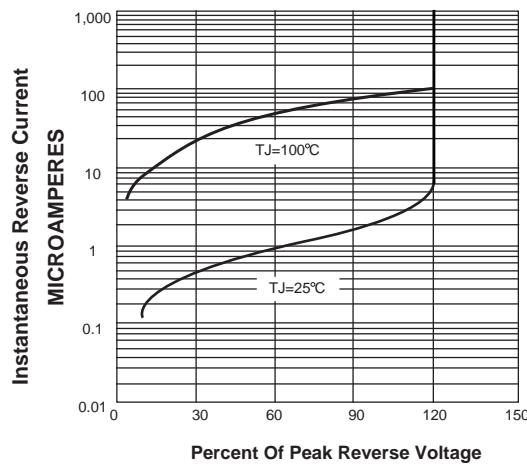


FIG. 5-TYPICAL JUNCTION CAPACITANCE

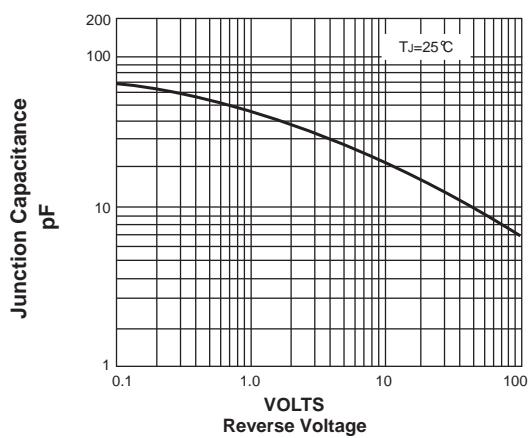


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

