

SL32AF~SL310AF 3.0Amp Schottky Barrier Rectifiers

Features

- ◆ For surface mounted applications
- ◆ Low forward voltage drop
- ◆ Low power loss, high efficiency
- ◆ Construction utilizes void-free molded plastic technique
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
260°C/10 seconds at terminals

Mechanical Data


Case : JEDEC SMAF molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight : 0.0014 ounce, 0.038 grams

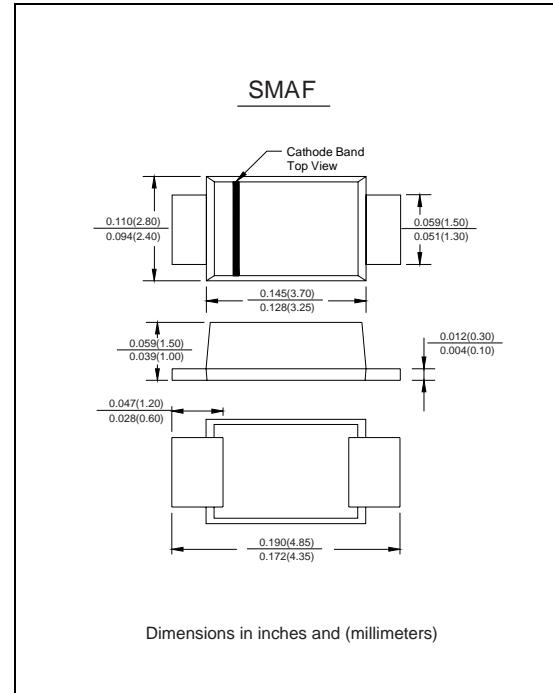

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	SL32AF	SL34AF	SL36AF	SL310AF	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	40	60	100	VOLTS
Maximum RMS voltage	V _{RMS}	14	28	42	70	VOLTS
Maximum DC blocking voltage	V _{DC}	20	40	60	100	VOLTS
Maximum average forward rectified current 0.375"(9.5mm) lead length(see fig.1)	I _(AV)	3.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	80.0				Amps
Maximum instantaneous forward voltage at 3.0A T _A =25°C T _A =125°C	V _F	0.40	0.45	0.55	0.70	Volts
		0.35	0.40	0.50	0.62	
Maximum DC reverse current at rated DC blocking voltage T _A =25°C T _A =125°C	I _R	1.0		0.5		mA
		50.0		20.0		
Typical junction capacitance (NOTE 1)	C _J	150				pF
Typical thermal resistance (NOTE 2)	R _{θJA}	30				°C/W
Operating junction temperature range	T _J ,	-50 to +125				°C

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.P.C.B. mounted with 0.2x0.2 (5.0x5.0mm) copper pad areas